



Three Phase Aluminum

MOTOR MODEL:	GX3-AL-TF-184T-2-B-D-5
FACTORY TYPE:	TXA

NEMA

Premium NEMA Cast Aluminum, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	5.0	5.0
Speed, RPM	3510	2900
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	11.5/5.77	13.5/6.75
Power Factor	0.91	-
Nominal Efficiency	88.5	87.1
Service Factor	1.25	1.0
KVA Code	L	J
FL Amps. @ 208 V	12.7	-
LRC @ 60Hz HV	45.0	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	88.0	0.7579
75%	88.8	0.8573
100%	88.5	0.87
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	45.0	45.0
3D Image Link		
GX3-AL-TF-184T-2-B-D-5		

GENERAL DATA			
Frame Size	184T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Aluminum		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 3/4"		
Feet Removable	true		
Double Drilled	-		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	62.0		
MECHANICAL DATA			
DE Bearing	6306ZZ		
NDE Bearing	6206ZZ		
dB No-Load	-		
Rotor Wk ² , Lb-Ft ²	-		
Comp Ring (wavy washer)	NDE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	22.3368	299.0	
Pull-Up Torque	17.9292	240.0	
Breakdown Torque	32.8703	440.0	
Full Load Torque	7.47051	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		

*This report valid for above Date Code and newer models, please contact Techtop for more info.




Three Phase Aluminum

MOTOR MODEL:	GX3-AL-TF-184T-2-B-D-5
FACTORY TYPE:	TXA

NEMA

Premium NEMA Cast Aluminum, TEFC

Torque Speed (T-n) Curve

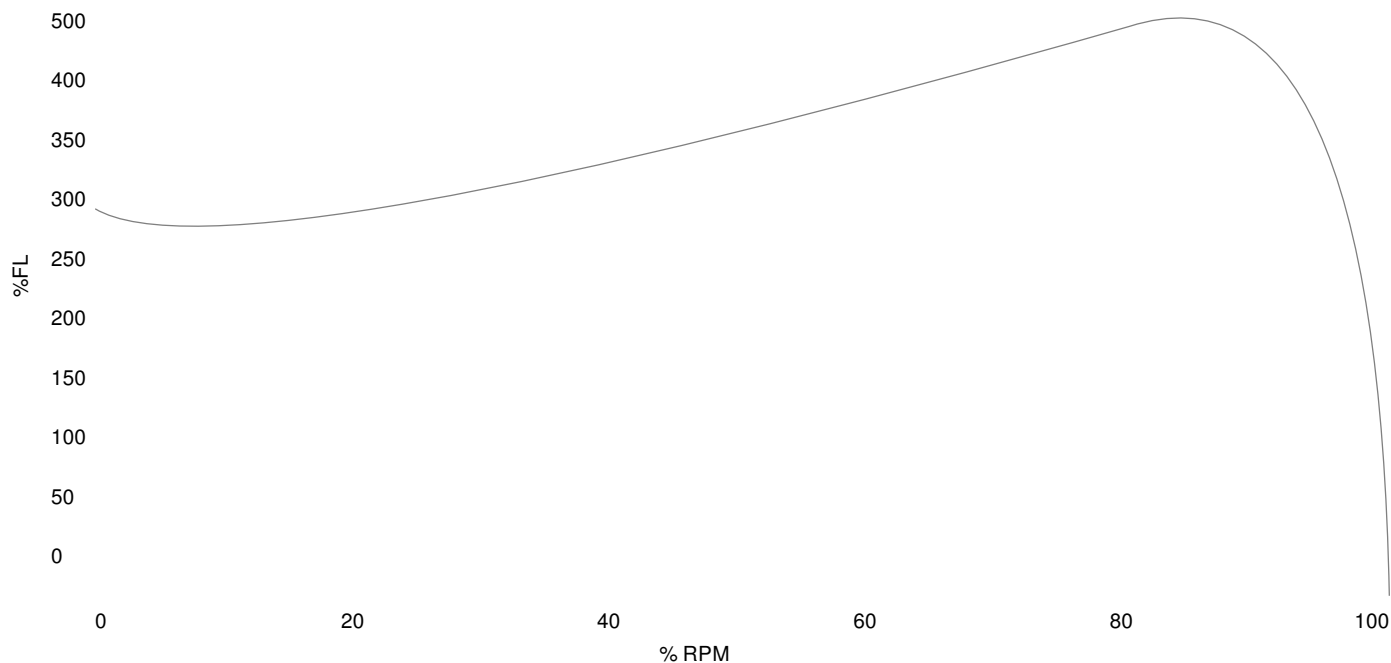

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	22.3368	299.0	Start Configuration
Pull-Up Torque	17.9292	240.0	Starting Current (A)
Breakdown Torque	32.8703	440.0	No-Load Current (A)
Full Load	7.47051	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	2.01	-	-	-	-
25	1.25	2.654	1.11458	3579.0	83.63	0.5257
50	2.5	3.499	2.11847	3561.0	88.0	0.7579
75	3.75	4.599	3.14907	3542.0	88.8	0.8573
100	5.0	6.1	4.21299	3510.0	88.5	0.87
125	6.25	7.178	5.30159	3501.0	87.91	0.9247

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com



Three Phase Aluminum

MOTOR MODEL:	GX3-AL-TF-184T-2-B-D-5
FACTORY TYPE:	TXA

NEMA

Premium NEMA Cast Aluminum, TEFC



Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com



Three Phase Aluminum

NEMA

MOTOR MODEL:	GX3-AL-TF-184T-2-B-D-5
FACTORY TYPE:	TXA

Premium NEMA Cast Aluminum, TEFC



Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com