






## Three Phase Aluminum

<b>MOTOR MODEL:</b>	GX3-AL-TF-215T-4-B-D-10
<b>FACTORY TYPE:</b>	TXA

# NEMA

### Premium NEMA Cast Aluminum, TEFC

Torque Speed (T-n) Curve

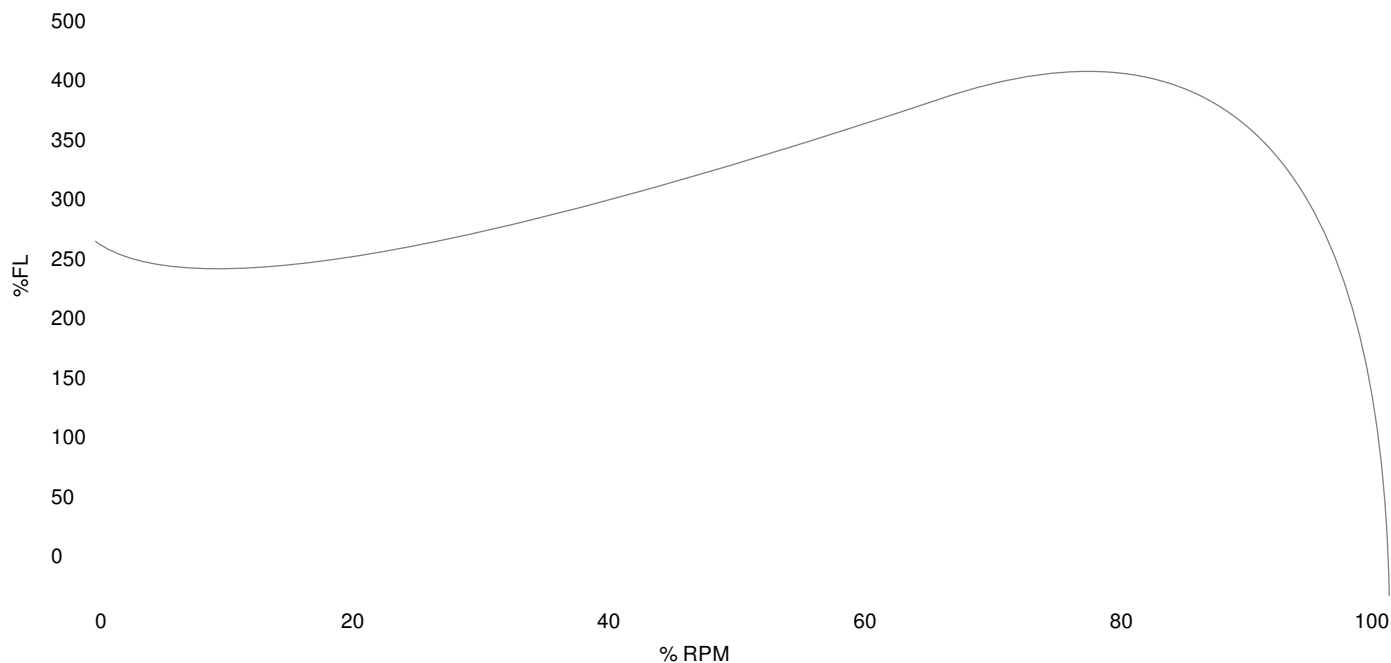

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	82.5288	274.0	Start Configuration
Pull-Up Torque	60.24	200.0	Starting Current (A)
Breakdown Torque	115.36	383.0	No-Load Current (A)
Full Load	30.12	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	-	-	-	-	-
25	2.5	-	-	-	-	-
50	5.0	-	-	-	-	-
75	7.5	-	-	-	-	-
100	10.0	-	-	-	-	-
125	12.5	-	-	-	-	-

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com



Three Phase Aluminum

<b>MOTOR MODEL:</b>	GX3-AL-TF-215T-4-B-D-10
<b>FACTORY TYPE:</b>	TXA

**NEMA**

---

Premium NEMA Cast Aluminum, TEFC

---



Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: [info@techttopind.com](mailto:info@techttopind.com)



Three Phase Aluminum


**NEMA**

<b>MOTOR MODEL:</b>	GX3-AL-TF-215T-4-B-D-10
<b>FACTORY TYPE:</b>	TXA

---

Premium NEMA Cast Aluminum, TEFC

---



Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: [info@techttopind.com](mailto:info@techttopind.com)