




Three Phase Aluminum

MOTOR MODEL:	GX3-AL-TF-145TC-4-B-D-1.5
FACTORY TYPE:	TXA

NEMA

Premium NEMA Cast Aluminum, TEFC

Torque Speed (T-n) Curve

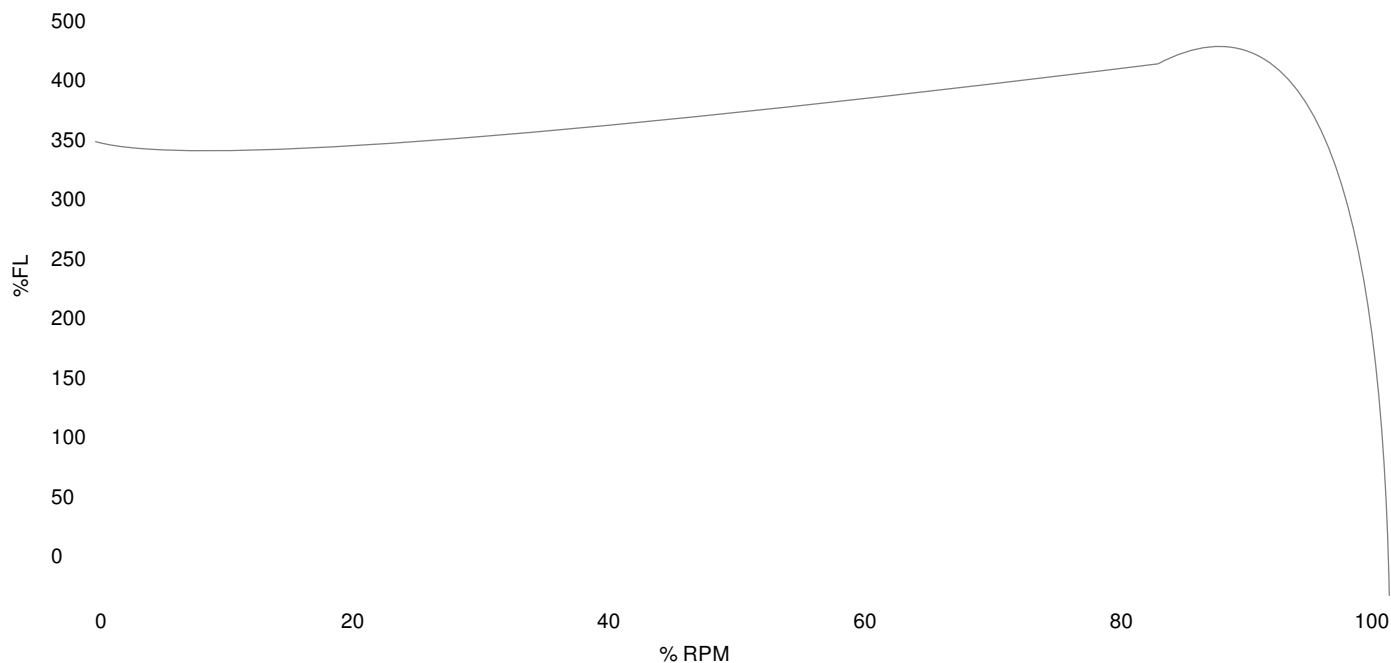

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	16.1544	351.0	Start Configuration
Pull-Up Torque	14.8197	322.0	Starting Current (A)
Breakdown Torque	18.9158	411.0	No-Load Current (A)
Full Load	4.60239	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	1.34	-	-	-	-
25	0.375	1.4	0.36898	1787.5	76.22	0.33
50	0.75	1.57	0.66518	1775.8	84.56	0.53
75	1.125	1.83	0.97214	1763.0	86.79	0.67
100	1.5	2.16	1.2917	1749.1	87.1	0.75
125	1.875	2.54	1.6257	1734.1	86.5	0.8

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com



Three Phase Aluminum

MOTOR MODEL:	GX3-AL-TF-145TC-4-B-D-1.5
FACTORY TYPE:	TXA

NEMA

Premium NEMA Cast Aluminum, TEFC



Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com




Three Phase Aluminum

NEMA

MOTOR MODEL:	GX3-AL-TF-145TC-4-B-D-1.5
FACTORY TYPE:	TXA

Premium NEMA Cast Aluminum, TEFC



Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com